




DSB-SC/SSB-SC AM GENERATION & DETECTION TRAINER

MODEL - COM102-3

This trainer has been designed with a view to provide practical and experimental knowledge of DSB-SC/SSB-SC AM Generation and Detection on a SINGLE PCB.

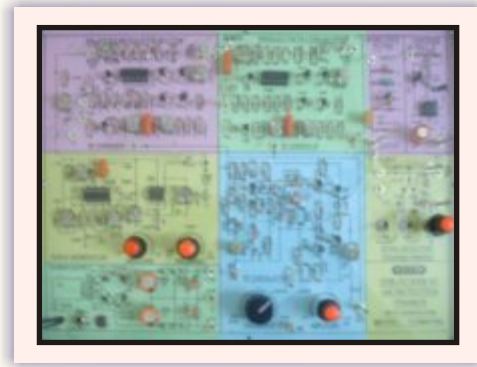

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based power supply.
3. On Board AF Modulating signal generator - Sine wave
Frequency Range : 300Hz to 3.4 KHz
Amplitude : 0 to 5 Vpp.
4. On Board RF carrier signal generator.
Frequency Range : 200 KHz to 1 MHz.
Amplitude : 0 to 10 Vpp.
5. Modulator Type : Balanced modulator.
6. Demodulator Type : Product detector with Low pass filter.
7. All parts are soldered on single PCB of size 12" x 9" with complete circuit diagram screen-printed.
8. Standard Accessories :
 1. A Training Manual.
 2. Connecting Patch cords.

EXPERIMENTS

1. To generate DSB-SC AM signal.
2. To generate SSB-SC AM signal.
3. To demodulate DSB-SC signal
4. To demodulate SSB-SC signal

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers and Kits
E-113, Jai Ambe Nagar,
Near Udgam School,
Thaltej,
AHMEDABAD - 380054.
INDIA.

Phone(O): +91-79-26852427/ 26850829
Phone(F): +91-79-26767512/ 26767648
Fax : +91-79-26840290/ 26840290
Mobile : +91-9824001168
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-